

DP TECHNICS

DPT-Module
Datasheet

1 General information

The DPT-Module is a general purpose embedded system with integrated 2.4GHz 802.11n WiFi. This module is targeted for hobby and semi-professional applications in need of a powerfull embedded linux platform. OpenWRT is installed by default and the module is compatible with the AR9331 trunk versions of this software.

2 Features

The DPT-Module has a typical power consumption of 0.36W@3.3V and contains a number of features:


- CPU: AR9331 400MHz SoC - MIPS24Kc CPU
- RAM: 64MiB (512Mbit) DDR2
- Flash: 16MiB Flash memory
- WiFi: 150Mbps WiFi g/n with on-board antenna
- USB 2.0 master interface
- 20 GPIO pins
- 2 times 100Mbps ethernet ports
- UART interface
- SPI interface

3 Absolute maximum ratings

For the most reliable use and stability of the module we advice to use the typical ratings. We do not guarantee the correct functioning of the device outside the minimum and maxium range of the module.

| Parameter | Units | Minimum rating | Typical rating | Maxium rating |
|-----------------------------|-------|----------------|----------------|---------------|
| DC Supply Voltage | V | 3.0 | 3.3 | 3.6 |
| Digital I/O Voltage | V | 1.5 | 2.50 | 2.62 |
| Current | A | 0.09 | 0.110 | 0.350 |
| Network transformer voltage | V | 1.9 | 2.2 | 2.3 |

4 Pin diagram

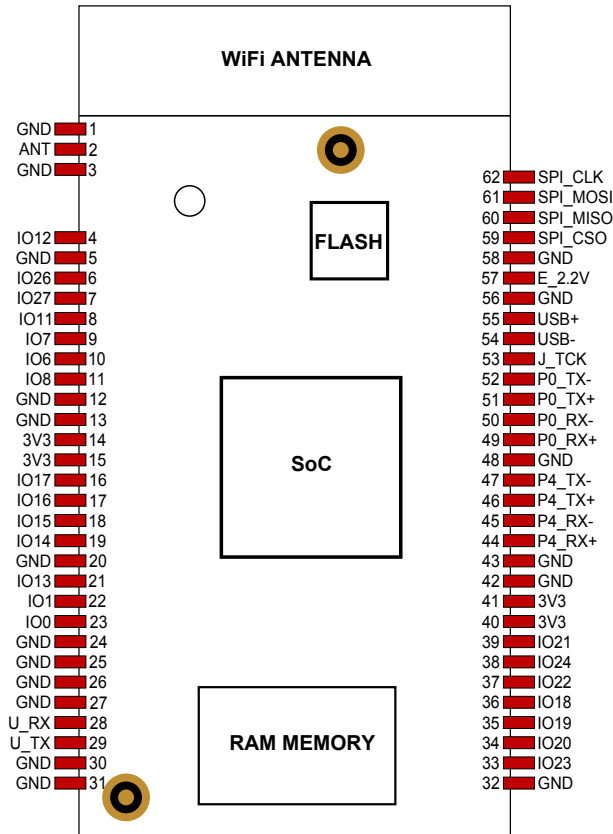


5 Pin descriptions

| Pin | Name | Input/Output | Description |
|-----|---------------|---------------|---|
| 1 | GND | input | GND connection |
| 2 | ANT | bidirectional | External antenna connector |
| 3 | GND | input | GND connection |
| 4 | GPIO12 | bidirectional | I/O line number 12 (floating) |
| 5 | GND | input | GND connection |
| 6 | IO26 | bidirectional | I/O line number 26 (floating) |
| 7 | IO27 | output | System LED 1K series output positive |
| 8 | IO11 | input | 1K and 100pF input, reset if connected with GND |
| 9 | IO7, JTAG_TDO | output | 10K pull-down output |
| 10 | IO6, JTAG_TDI | output | 10K pull-down output |
| 11 | IO8, JTAG_TMS | output | 10K pull-down output |
| 12 | GND | input | GND connection |
| 13 | GND | input | GND connection |
| 14 | 3V3 | input | Supply voltage pin (recommended with pin 15) |
| 15 | 3V3 | input | Supply voltage pin (recommended with pin 14) |

| Pin | Name | Input/Output | Description |
|-----|--------|---------------|---|
| 16 | IO17 | output | 10K pull-up output |
| 17 | IO16 | bidirectional | 10K pull-down output |
| 18 | IO15 | bidirectional | 10K pull-down output |
| 19 | IO14 | bidirectional | 10K pull-down output |
| 20 | GND | input | GND connection |
| 21 | IO13 | output | 10K pull-up output |
| 22 | IO1 | output | 10K pull-up output |
| 23 | IO0 | output | 10K pull-down output |
| 24 | GND | input | GND connection |
| 25 | GND | input | GND connection |
| 26 | GND | input | GND connection |
| 27 | GND | input | GND connection |
| 28 | U_RX | input | UART receive connection |
| 29 | U_TX | output | UART transmit connection |
| 30 | GND | input | GND connection |
| 31 | GND | input | GND connection |
| 32 | GND | input | GND connection |
| 33 | IO23 | bidirectional | I/O line number 23 |
| 34 | IO20 | bidirectional | I/O line number 20 |
| 35 | IO19 | bidirectional | I/O line number 19 |
| 36 | IO18 | bidirectional | I/O line number 18 |
| 37 | IO22 | bidirectional | I/O line number 22 |
| 38 | IO24 | bidirectional | I/O line number 24 |
| 39 | IO21 | bidirectional | I/O line number 21 |
| 40 | 3V3 | input | Supply voltage pin |
| 41 | 3V3 | input | Supply voltage pin |
| 42 | GND | input | GND connection |
| 43 | GND | input | GND connection |
| 44 | P4_RX+ | input | LAN port 4 positive RX connection, default WAN port |
| 45 | P4_RX- | input | LAN port 4 negative RX connection, default WAN port |
| 46 | P4_TX+ | input | LAN port 4 positive TX connection, default WAN port |
| 47 | P4_TX- | input | LAN port 4 negative TX connection, default WAN port |
| 48 | GND | input | GND connection |

| Pin | Name | Input/Output | Description |
|------------|-------------|---------------------|---|
| 49 | P0_RX+ | input | LAN port 0 positive RX connection |
| 50 | P0_RX- | input | LAN port 0 negative RX connection |
| 51 | P0_TX+ | input | LAN port 0 positive TX connection |
| 52 | P0_TX- | input | LAN port 0 negative TX connection |
| 53 | J_TCK | output | JTAG Test Clock connection |
| 54 | USB- | bidirectional | USB negative data connection |
| 55 | USB+ | bidirectional | USB positive data connection |
| 56 | GND | input | GND connection |
| 57 | E_2.2V | output | ethernet transformer bias voltage |
| 58 | GND | input | GND connection |
| 59 | SPI_CSO | output | SPI slave select output |
| 60 | SPI_MISO | input | SPI Master In Slave Out (MISO) connection |
| 61 | SPI_MOSI | output | SPI Master Out Slave In (MOSI) connection |
| 62 | SPI_CLK | output | SPI clock connection |

6 Mechanical information

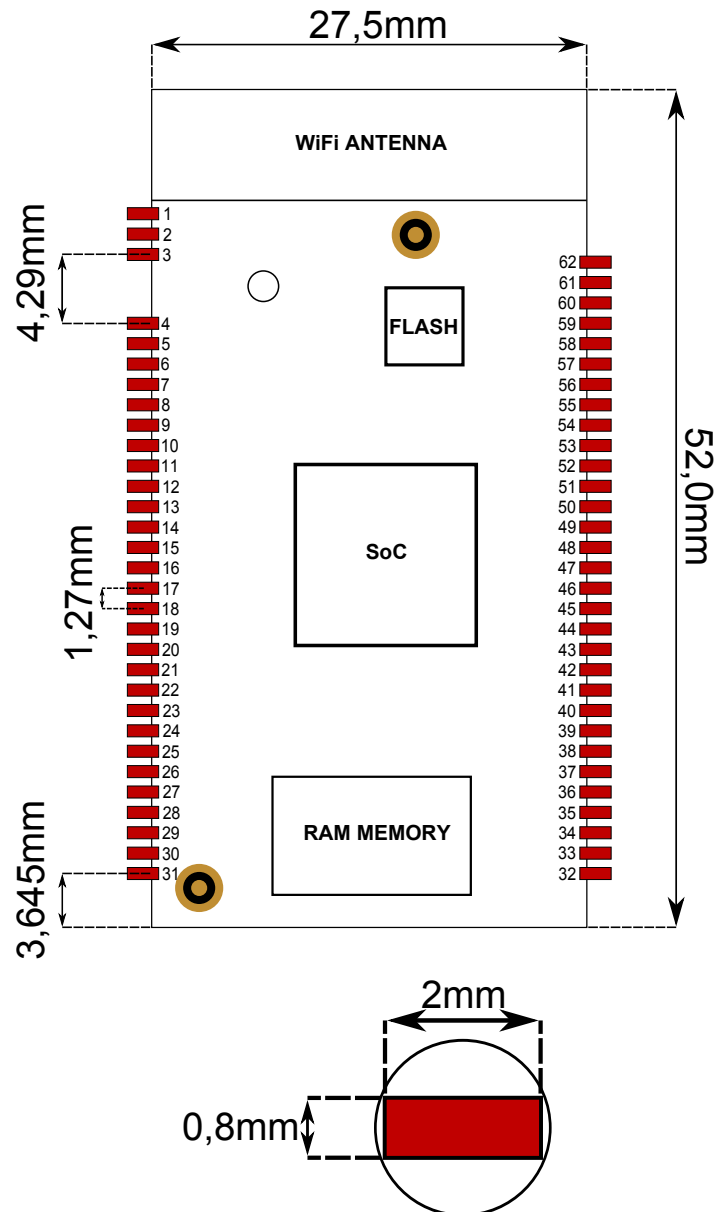

7 Power supply recommendations

All the 3V3 and GND pins are interconnected on the board but it is recommended to use more than one of these pins to give power supply to the module. It is sufficient to use pin 14 and 15 for feeding the supply voltage. Please use 100nF ceramic capacitors for decoupling.

8 GPIO ports

The GPIO ports are not 3.3V resistant and you must use a voltage divider circuit if you want to connect a 3.3V or 5V circuit to one of the GPIO pins.

9 Software

The module comes with the OpenWRT Linux distribution preflashed and with the handy LuCi webinterface installed in the distribution. We will continue to release new software which you can download from <http://www.dpstechnics.com>.

10 Operating conditions

The module can operate in a wide range of temperatures and conditions. The following are guidelines in which the module is guaranteed to work correctly.

| Parameter | Units | Minimum rating | Typical rating | Maxium rating |
|---------------------|-------|----------------|----------------|---------------|
| Working temperature | °C | 0 | | 40 |
| Storage temperature | °C | -40 | | 70 |
| Humidity | %RH | 10 | | 90 |
| Storage humidity | %RH | 5 | | 90 |

Please note that no condensation may occur on the PCB and components.

11 Moisture sensitivity

The DPT-Module V1 contains highly complex semiconductors. When the module is not going to be manually soldered to its carrier board it is recommended to bake out any moisture prior to the reflow solder process. The following baking times and temperatures are recommended:

- Baking in plastic tray: 84 hours @ 50°C
- Baking in bulk, without tray: 16 hours @ 125°C

The parts must always be baked with the semiconductors facing upwards. After the baking process the parts must be assembled/reflowed within 168 hours (given an environment of 30°C and 60%RH). If the parts are not assembled within 168 hours the baking process must be repeated.

12 Legal information

This module is distributed worldwide by DPTechnics. We are not responsible for any product this module is part of. This datasheet is made with great care for detail but it can be possible the datasheet will be updated with more accurate data in the future. Users of DPTechnics products can contact us by letter, telephone or email.

DPTechnics
Westkapellestraat 396/44
8300 Knokke-Heist
Belgium

Tel: +32(0)50 62 13 79
email: info@dptechnics.com
web: <http://www.dptechnics.com>